

**Starcraft 71.**  
**Whatever you want, just say the word.**

# This is the year. These are the boats. Decide.



21' Chieftain-V (Page 4)



21' Islander-V (Page 5)



18' Starchief-V (Page 6)



18' Holiday-V (Page 7)



18' Offshore-V (Page 8)



16' Jupiter-V (Page 9)



16' Super Sport-V (Page 9)



15' Sprint-V (Page 10)



15' Jet Star-V (Page 10)



14' Falcon (Page 10)



21' & 18' Mariner-V (Page 11)



18' & 15' Star Trek-V (Page 13)



16' & 14' Seafarer (Page 14)



14' & 12' Super Star (Page 14)



14' & 12' Sea Scamp (Page 15)



11' Cartopper (Page 15)



20' V-200 (Page 16)



18' V-180 (Page 16)



17' T-170 Eliminator (Page 17)



16' V-160 (Page 17)



17' TR-170 Deluxe (Page 18)



17' TR-170 Sport (Page 19)



15' TR-150 Sport (Page 19)



15' TR-150 Deluxe (Page 20)



15' V-150 Deluxe (Page 21)



15' V-150 Modified (Page 21)



14' V-140 Modified (Page 21)



14' Skylark (Page 24)

*This warranty applies only to the original registered owner of a STARCRAFT boat and is valid only if the registration card is returned within 30 days of original purchase.*  
**WARRANTY**—All registered Starcraft boats are warranted for a period of 24 months from the date of purchase against defects in materials and workmanship. Further, riveted aluminum hulls are warranted for 15 years against metal fatigue, cracks, and/or popped rivets in normal recommended use.

During the warranty period, Starcraft will repair any defect in the structure of the boat, except exterior finishes. Repairs can be made at any of our franchised servicing centers located throughout the United States and Canada.


The franchised servicing center reserves the option to return the boat to the

nearest Starcraft factory for repairs. In this case, there will be a minimum handling charge involved.

The judgment of our factory trained experts is final as to the extent of liability. Any repair made as a result of an accident, neglect, alteration, or abuse will be made at a charge to the owner.


**Other than as herein stated, Starcraft makes no warranty of merchantability, and there are no warranties which extend beyond the description on the face hereof.**



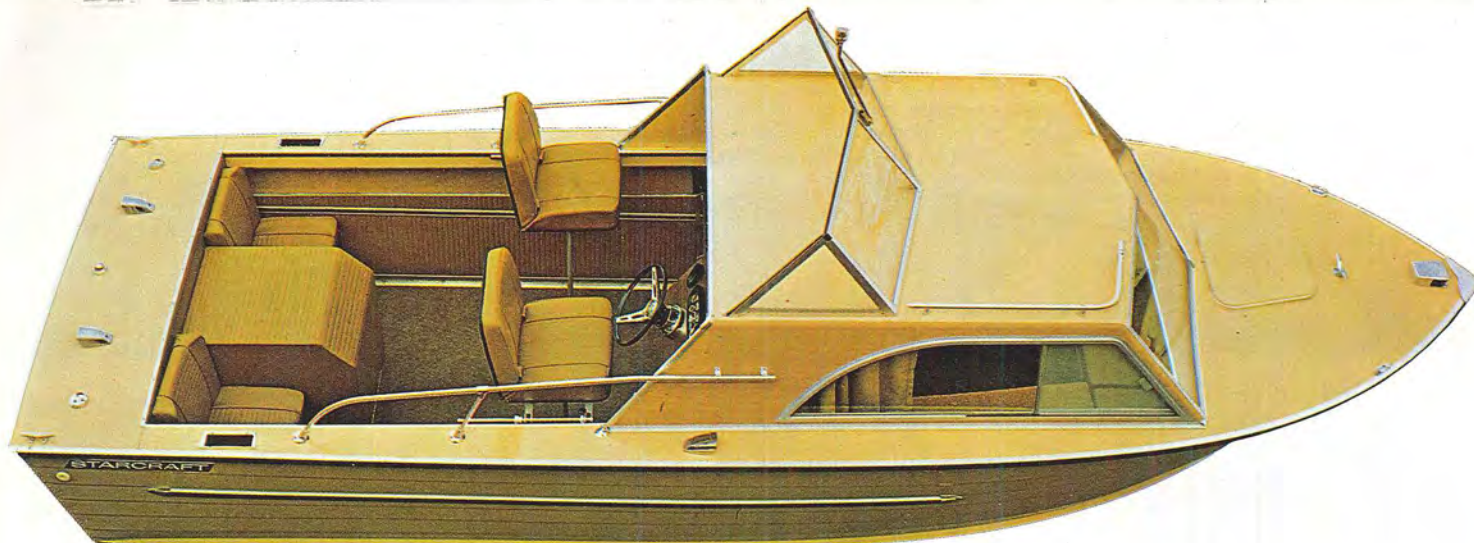

CHIEFTAIN-V I.O. 21' Marine Aluminum Cruiser

CABIN INTERIOR

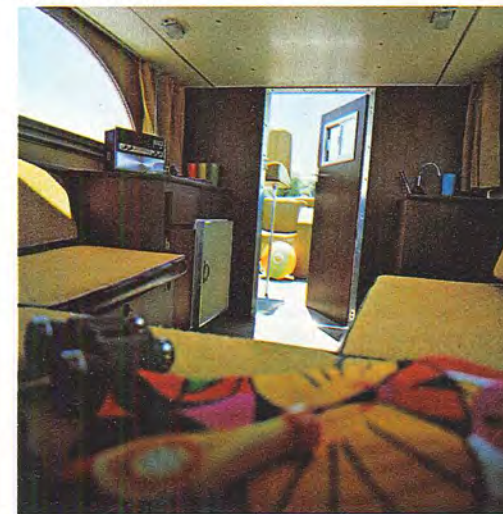

## Chieftain-V I.O.

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
21' Chieftain-V I.O.	21'1"	22'6"	90"	50"	80"	43"	2000	10	165	1640 lbs.*	.085	.075	.086	.077

**Chieftain-V Standard Equipment Includes:** Safety Glass Flying Bridge Windshield • International Navigation Lights • Cabin Interior Lights • Electric Bilge Pump • Mechanical Steering • 2 Folding Helmsman Seats • Stern Jump Seats • Electric Blower • 2-18 Gallon Fuel Tanks • Sink, Ice Box, Water System • Sliding Cabin Side Windows • Window Screens • Locking Cabin Door • Cabin Headliner and Curtains • Cabin Cushions and Back Rests • Positive Foam Flotation • Front Deck Hatch • Built-in Space for Marine Head • **Available Accessories:** Bow Rail Kit • \*Weight shown is without engine. Add 585 lbs. for 120 h.p. MerCruiser, 597 lbs. for 140 h.p., or 662 lbs. for 165 h.p.



ISLANDER-V I.O. 21' Marine Aluminum Cruiser

CABIN INTERIOR




## Islander-V I.O.

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
21' Islander-V I.O.	21'1"	22'6"	90"	50"	80"	40"	2000	10	165	1540 lbs.*	.085	.075	.086	.077

**Islander-V Standard Equipment Includes:** Safety Glass Flying Bridge Windshield • International Navigation Lights • Cabin Interior Lights • Electric Bilge Pump • Mechanical Steering • 2 Swivel Helmsman Seats • Stern Jump Seats • Electric Blower • 2-18 Gallon Fuel Tanks • Cabin Cushions and Back Rests • Positive Foam Flotation • Locking Cabin Door • Front Deck Hatch • Built-in Space for Marine Head • **Available Accessories:** Bow Rail Kit • \*Weight shown is without engine. Add 585 lbs. for 120 h.p. MerCruiser, 597 lbs. for 140 h.p., or 662 lbs. for 165 h.p.



STARCHIEF-V I.O. 18' Marine Aluminum Cruiser

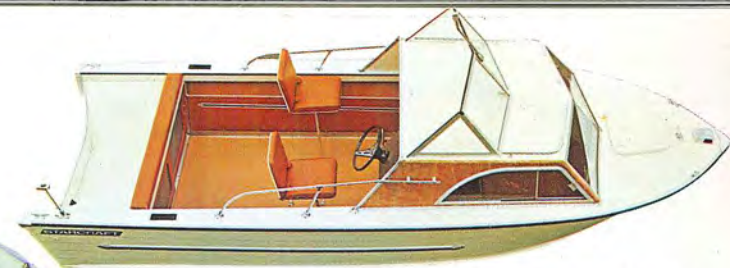

STARCHIEF-V O.B. 18' Marine Aluminum Cruiser




## Starchief-V I.O. and O.B.

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
18' Starchief-V I.O.	18'-2"	19'6"	81"	43"	75"	36"	1700	8	140	1035 lbs.*	.080	.063	.086	.077
18' Starchief-V O.B.	18'-2"	19'6"	81"	43"	75"	21"	1900	8	140	980 lbs.	.080	.063	.086	.077

**Starchief-V I.O./O.B. Standard Equipment Includes:** Safety Glass Flying Bridge Windshield • International Navigation Lights • Cabin Interior Light • Electric Bilge Pump • Mechanical Steering • Two Folding Helmsman Seats • Built-In Space for Marine Head • Sliding Cabin Side Windows • Locking Cabin Door • Cabin Cushions and Back Rests • Positive Foam Flotation • Front Deck Hatch • Stern Jump Seats (I.O. only) • Electric Blower (I.O. only) • 18 Gallon Fuel Tank (I.O. only) • **Available Accessories:** Bow Rail Kit • Second 18 Gallon Fuel Tank with installation kit • \*I.O. weight shown is without engine. Add 585 lbs. for 120 h.p. MerCruiser, 597 lbs. for 140 h.p.



HOLIDAY-V I.O. 18' Marine Aluminum Runabout

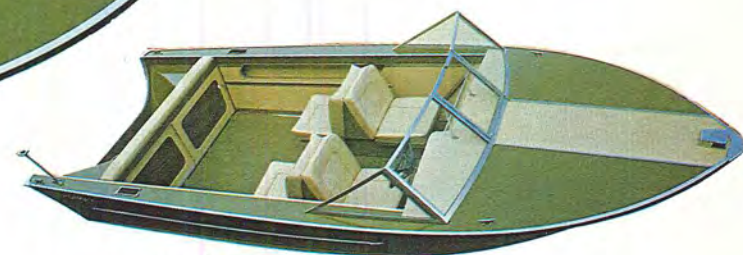

HOLIDAY-V O.B. 18' Marine Aluminum Runabout


## Holiday-V I.O. and O.B.

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
18' Holiday-V I.O.	18'2"	19'6"	84"	44"	75"	36"	1700	8	140	865 lbs.*	.080	.063	.086	.077
18' Holiday-V O.B.	18'2"	19'6"	84"	44"	75"	21"	1900	8	140	880 lbs.	.080	.063	.086	.077

**Holiday-V I.O./O.B. Standard Equipment Includes:** Center Walk-thru Safety Glass Windshield • Back-to-Back Convertible Sleeper Seats • Stern Jump Seats (I.O. only) • Mechanical Steering • Running Lights • Electric Bilge Pump • Electric Bilge Blower (I.O. only) • 18 Gallon Fuel Tank (I.O. only) • Deluxe vinyl Interior • Positive Foam Flotation • Console Glove Box • **Available Accessories:** Bow Rail Kit • Second 18 Gallon Fuel Tank with installation kit (I.O. only) • \*Weight shown is without engine. Add 585 lbs. for 120 h.p. MerCruiser, 597 lbs. for 140 h.p.



SPRINT-V 15' Marine Aluminum Runabout

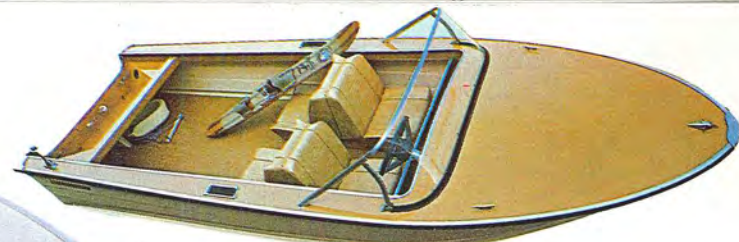

JET STAR-V 15' Marine Aluminum Runabout




FALCON 14' Marine Aluminum Runabout


## Sprint-V/Jet Star-V/Falcon

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
<b>Sprint-V</b>	15'0"	16'2"	72"	34"	63"	21"	1300	6	65	550 lbs.	.065	.060	.086	.077
<b>Jet Star-V</b>	15'1"	16'5"	67"	32"	56"	21"	1100	5	50	500 lbs.	.065	.060	.086	.077
<b>Falcon</b>	14'0"	14'11"	66"	32"	56"	16"	950	4	40	380 lbs.	.065	.060	.086	.077

**Sprint-V, Jet Star-V and Falcon Standard Equipment Includes:** Plexiglass Windshield • Back-to-Back Seats • Convertible Sleeper Seats • Mechanical Steering • Cable and Pulley Steering • Deluxe Vinyl Interior • Positive Foam Flotation • Electric Bilge Pump (boat is pre-wired)

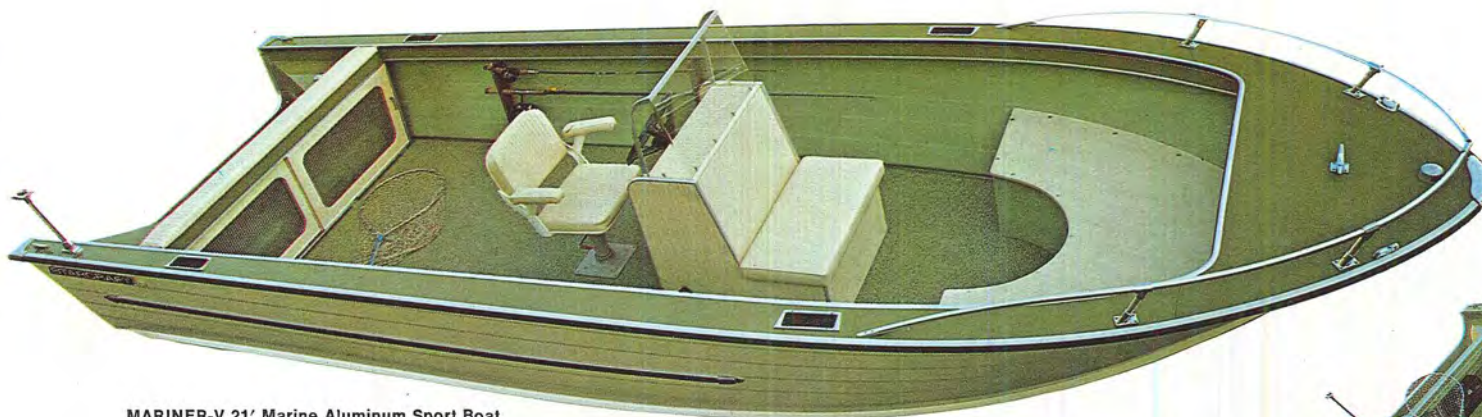

MARINER-V 21' Marine Aluminum Sport Boat

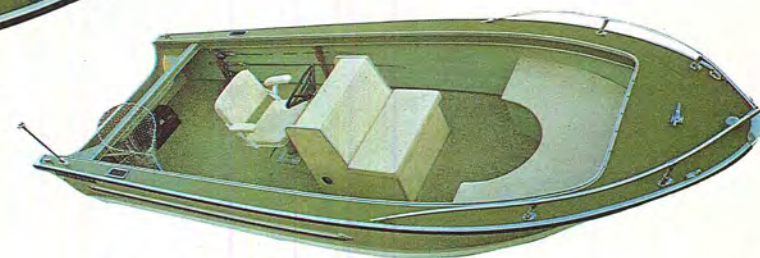


MARINER-V 18' Marine Aluminum Sport Boat


## Mariner-V

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
<b>18' Mariner-V</b>	18'0"	19'7"	79"	37"	74"	21"	1800	8	125	655 lbs.	.080	.060	.086	.077
<b>20' Mariner-V</b>	20'8"	22'2"	86"	40"	79"	21"	2000	10	140	875 lbs.	.085	.063	.086	.077

**Mariner-V Standard Equipment Includes:** Mechanical Steering • Running Lights • Fishing Rod Racks • Vinyl Floor Covering • Swivel Fishing Chair • Bow Rail • Positive Foam Flotation • 25 Gallon Fuel Tank (21' only) • Electric Bilge Pump • Plexiglass Windshield (21' only) • **Available Accessories:** Plexiglass Windshield (for 18') • Fishbox Seat with Plastic Inner Liner.

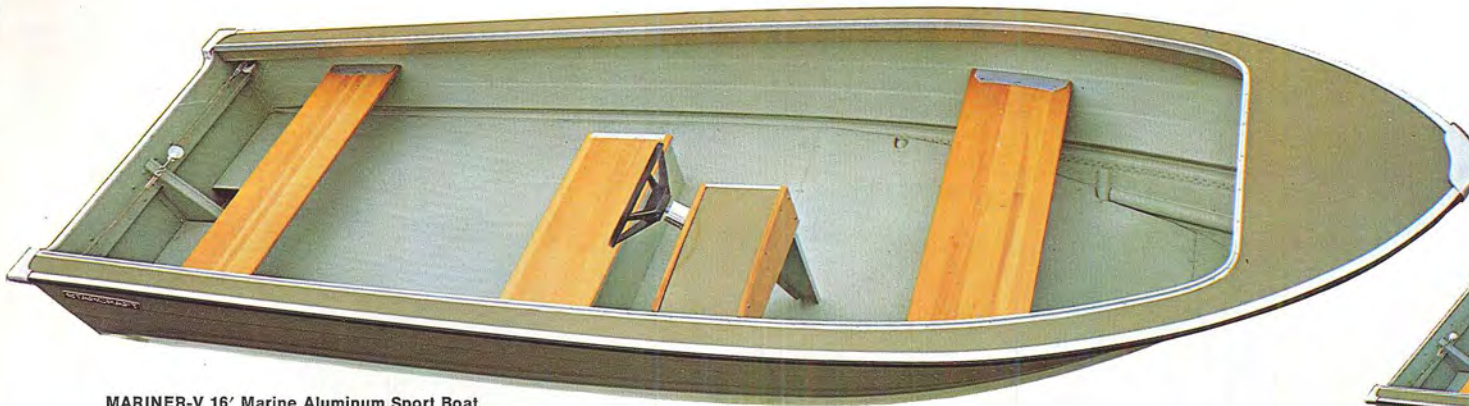

MARINER-V 16' Marine Aluminum Sport Boat

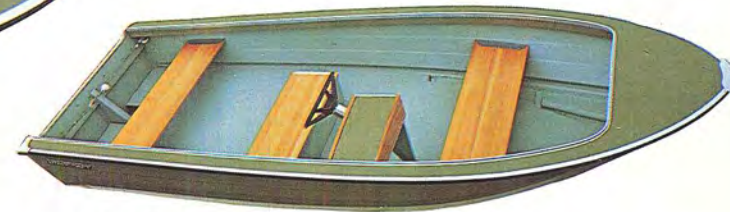


MARINER-V 14' Marine Aluminum Sport Boat

## Mariner-V


page 12

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
14' Mariner-V	14'2"	15'4"	65"	27"	56"	21"	850	4	40	340 lbs.	.065	.060	.086	.077
16' Mariner-V	16'1"	17'2"	65"	27"	56"	21"	1300	5	50	380 lbs.	.065	.060	.086	.077

**Mariner-V Standard Equipment Includes:** Cable and Pulley Steering • Painted Non-Skid Interior • Siphon Drain • Varnished Wood Seats • Bow Eye • Stern Handles • Bow and Stern Castings • Aluminum Gunwale Extrusions • Plywood Motor Mount • Aluminum Transom Cap • Positive Foam Flotation.

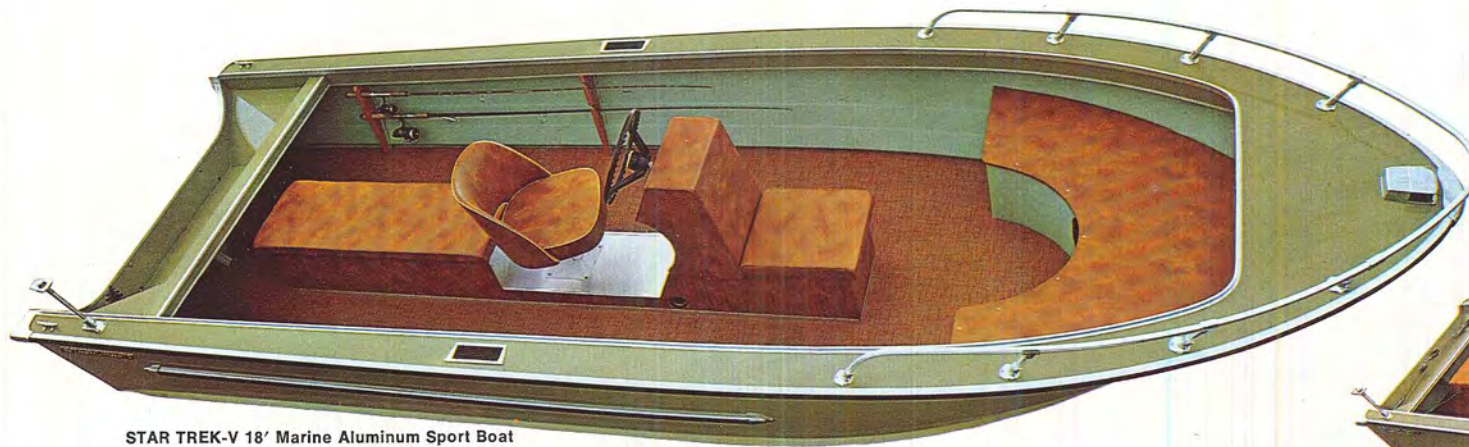

STAR TREK-V 18' Marine Aluminum Sport Boat

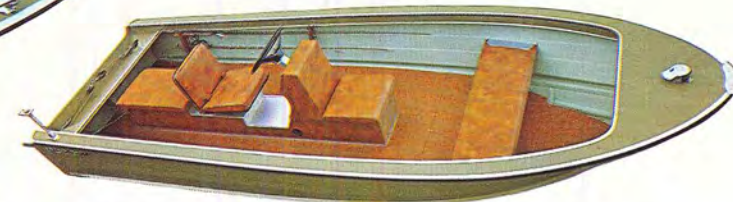

STAR TREK-V 15' Marine Aluminum Sport Boat

## Star Trek-V


page 13

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
15' Star Trek-V	15'1"	16'3"	65"	27"	56"	21"	1100	5	45	460 lbs.	.065	.060	.086	.077
18' Star Trek-V	18'0"	19'7"	79"	37"	74"	21"	1800	8	125	700 lbs.	.065	.060	.086	.077

**Star Trek-V Standard Equipment Includes:** Mechanical Steering • Running Lights • Fishing Rod Racks • Vinyl Floor Covering • Siphon Drain • Swivel Helm Seat • Bow Rail (18' only) • Positive Foam Flotation.



SEAFARER 14' Marine Aluminum Fishing Boat

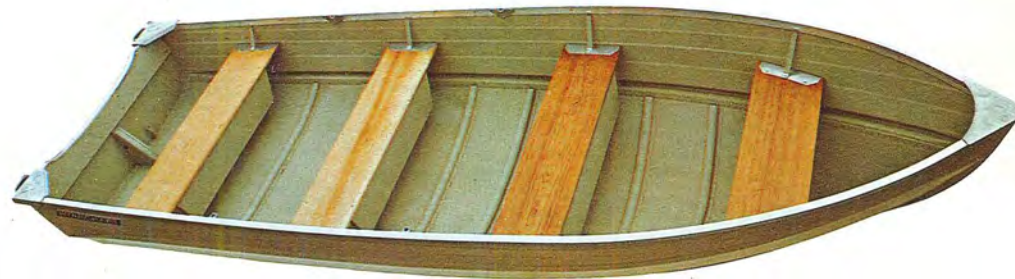

SUPER STAR 14' Marine Aluminum Fishing Boat



SEAFARER 16' Marine Aluminum Fishing Boat



SUPER STAR 12' Marine Aluminum Fishing Boat


## Seafarer/Super Star

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
12' Super Star	12'0"	12'9"	57"	22"	50"	16"	600	3	10	138 lbs.	.060	.053	.086	.077
14' Super Star	14'1"	14'10"	57"	23"	50"	16"	800	4	20	174 lbs.	.060	.053	.086	.077
14' Seafarer	14'2"	15'0"	63"	27"	54"	16"	850	4	20	200 lbs.	.065	.053	.086	.077
16' Seafarer	16'2"	16'11"	63"	27"	54"	20"	1300	6	35	260 lbs.	.065	.053	.086	.077

**Super Star/Seafarer Standard Equipment Includes:** Oar Sockets • Painted Non-Skid Interior • Siphon Drain • Varnished Wood Seats • Bow Eye • Stern Handles • Bow and Stern Castings • Aluminum Gunwale Extrusions • Plywood Motor Mount • Aluminum Transom Cap • Positive Foam Flotation.



SEA SCAMP 12' Marine Aluminum Fishing Boat

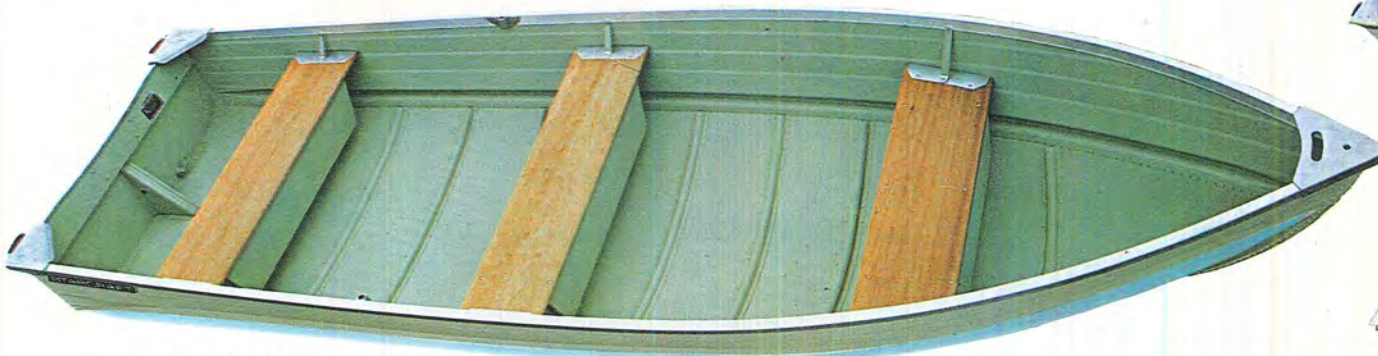

SEA SCAMP 14' Marine Aluminum Fishing Boat




CARTOPPER 11' Marine Aluminum Fishing Boat

## Sea Scamp/Cartopper

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity			Approx. Weight	Aluminum Thickness			
					Width	Height	Pounds	Persons	H.P.		Bottom & Ribs	Sides	Transom & Bow	Keel
11' Cartopper	11'0"	11'7"	48"	21"	41"	15"	450	2	5	92 lbs.	.051	.051	.086	.077
12' Sea Scamp	12'0"	12'8"	53"	22"	46"	16"	500	3	10	127 lbs.	.051	.051	.086	.077
14' Sea Scamp	14'0"	14'8"	53"	22"	46"	16"	700	3	20	144 lbs.	.051	.051	.086	.077


**Cartopper/Sea Scamp Standard Equipment Includes:** Oar Sockets • Painted Non-Skid Interior • Siphon Drain • Varnished Wood Seats (Sea Scamps) • Aluminum Seats (Cartopper) • Bow Eye (Sea Scamps only) • Bow Handle • Stern Handles • Bow and Stern Castings • Aluminum Gunwale Extrusions • Plywood Motor Mount • Aluminum Transom Cap • Positive Foam Flotation.

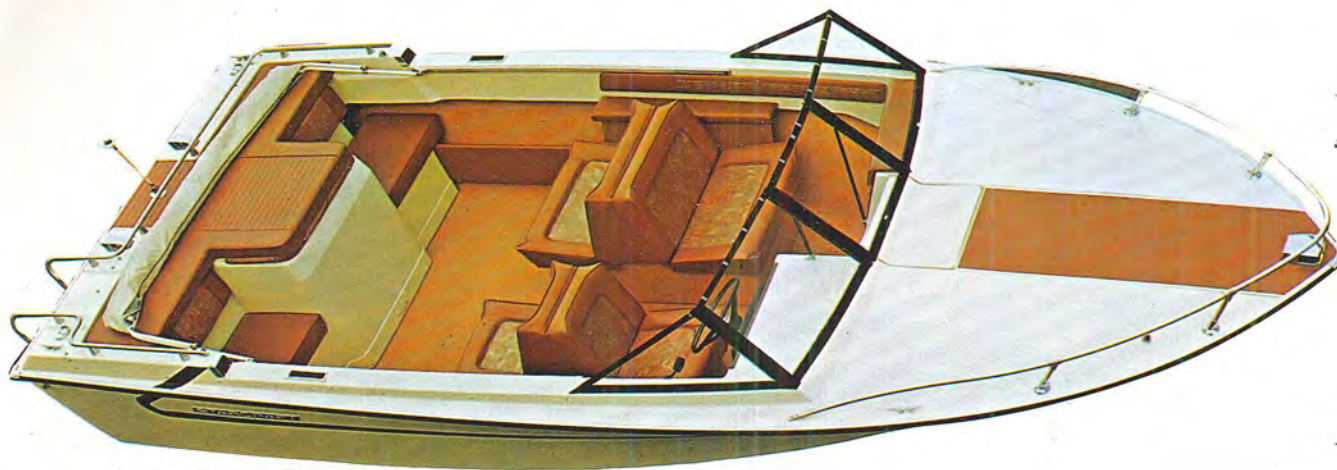

V-200 I.O. 20' Fiberglass Runabout



V-180 O.B. 18' Fiberglass Runabout

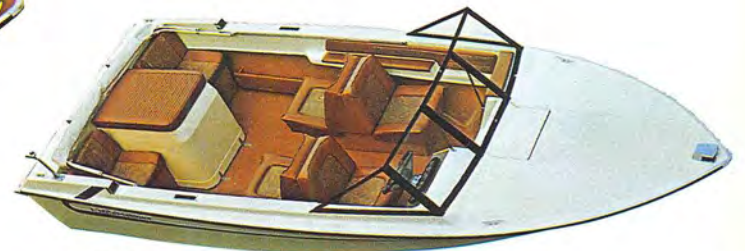


V-180 I.O. 18' Fiberglass Runabout


## V-200 I.O./V-180 I.O. and O.B.

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom Width	Transom Height	Recommended Capacity			Approx. Weight
18' V-180 O.B.	18'2"	19'4"	86"	44"	78"	20"	1900 lbs.	8 persons	140 h.p.	1100 lbs.
18' V-180 I.O.	18'2"	19'4"	86"	44"	78"	38"	1700 lbs.	8 persons	165 h.p.	1180 lbs.*
20' V-200 I.O.	20'0"	21'7"	93"	45"	86"	38"	2000 lbs.	9 persons	235 h.p.	1400 lbs.*

**V-180 O.B./I.O. Standard Equipment Includes:** Center Walk-Thru Safety Glass Windshield • Back-to-Back Convertible Sleeper Seats • Stern Seats • Mechanical Steering • Running Lights • Electric Bilge Pump • Positive Foam Flotation • Deluxe Vinyl Interior • **Available Accessories:** Stern Seats (I.O. only) • Mechanical Steering • Electric Bilge Blower (I.O. only) • 18 Gallon Fuel Tank (I.O. only) • Convertible Top Group (I.O. only) • **Available Accessories:** 2nd 18 Gallon Fuel Tank (I.O. only) • **V-200 I.O. Standard Equipment Includes:** Center Walk-Thru Safety Glass Windshield • Back-to-Back Convertible Sleeper Seats • Stern Seats • Mechanical Steering • Running Lights • Electric Bilge Pump • Electric Bilge Blower • 18 Gallon Fuel Tank • 2nd 18 Gallon Fuel Tank • Convertible Top Group • Positive Foam Flotation • Bow Rail • Deluxe Vinyl Interior • Aft Rail and Swimming Ladder • \*Weight shown is without engine. Add 585 lbs. for 120 h.p. MerCruiser, 597 lbs. for 140 h.p. MerCruiser, 662 lbs. for 165 h.p. MerCruiser, 568 lbs. for 120 h.p. OMC, 710 lbs. for 155 h.p. OMC, 810 lbs. for 215 h.p. OMC or 830 lbs. for 235 h.p. OMC.

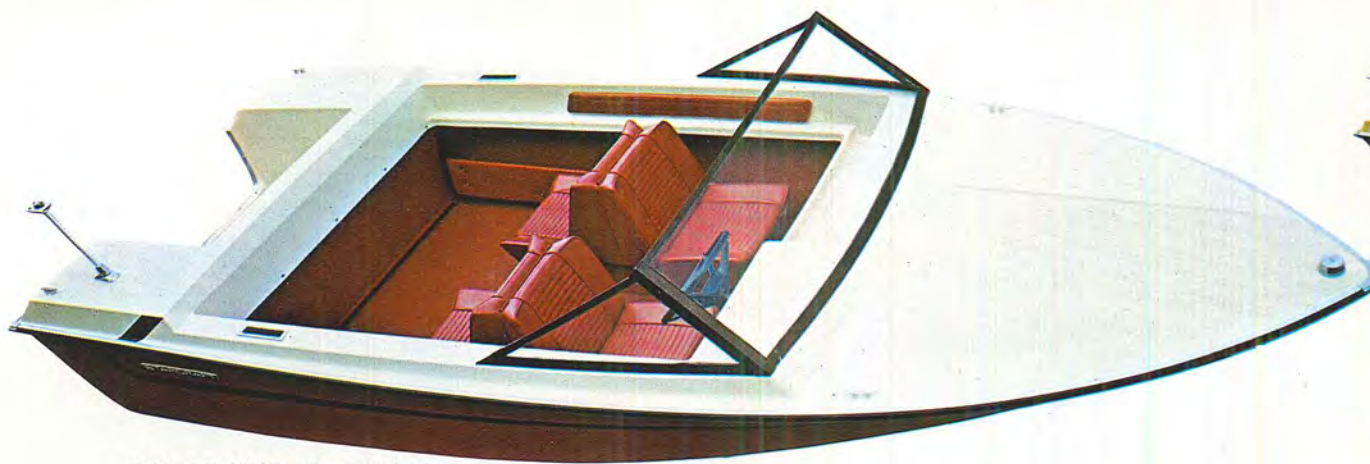

V-160 O.B. 16' Fiberglass Runabout

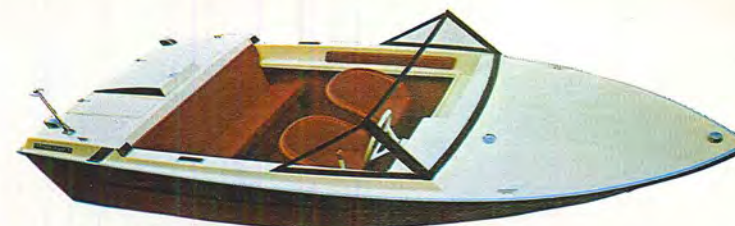

V-160 I.O. 16' Fiberglass Runabout




T-170 ELIMINATOR 17' Fiberglass Runabout

## V-160 I.O. and O.B./T-170 Eliminator

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom Width	Transom Height	Recommended Capacity			Approx. Weight
16' V-160 O.B.	16'2"	17'4"	78"	38"	71"	20"	1500 lbs.	6 persons	100 h.p.	760 lbs.
16' V-160 I.O.	16'2"	17'4"	78"	38"	71"	31"	1300 lbs.	6 persons	155 h.p.	800 lbs.*
17' T-170 Eliminator	17'0"	18'10"	90"	31"	90"	20"	1100 lbs.	4 persons	140 h.p.	775 lbs.

**V-160 O.B. Standard Equipment Includes:** Back-to-Back Seats • Convertible Sleeper Seats • Plexiglass Windshield • Mechanical Steering • Running Lights • Deluxe Vinyl Interior • Positive Foam Flotation • **Available Accessory:** Bow Rail • **V-160 I.O. Standard Equipment Includes:** Swivel Bucket Seats • Stern Seating • Plexiglass Windshield • Mechanical Steering • Running Lights • Electric Bilge Pump • Electric Bilge Blower • 18 Gallon Fuel Tank • Deluxe Vinyl Interior • Positive Foam Flotation • **Available Accessory:** Bow Rail • **T-170 Eliminator Standard Equipment Includes:** Back-to-Back Seats • Mechanical Steering • Running Lights • Deluxe Vinyl Interior • Positive Foam Flotation. • \*Weight shown is without engine. Add 585 lbs. for 120 h.p. MerCruiser, 597 lbs. for 140 h.p. MerCruiser, 568 lbs. for 120 h.p. OMC.



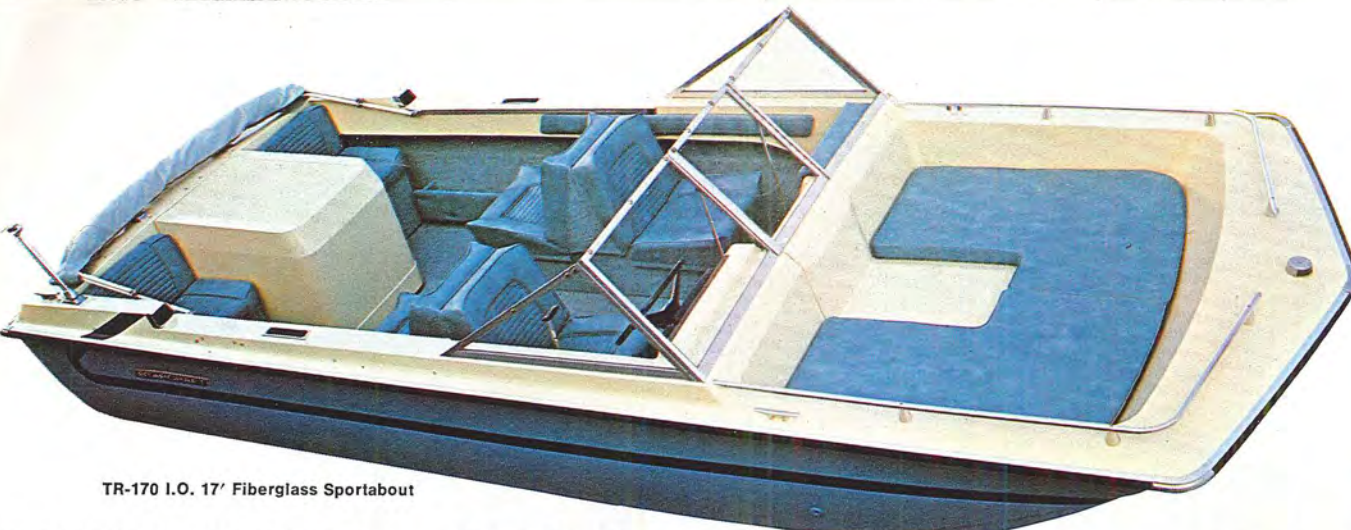

TR-170 I.O. 17' Fiberglass Sportabout



TR-170 O.B. DELUXE 17' Fiberglass Sportabout



TR-170 O.B. CUSTOM 17' Fiberglass Sportabout


## TR-170 I.O./O.B. Deluxe/O.B. Custom

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom Width	Transom Height	Recommended Capacity		Approx. Weight	
17' TR-170 O.B. Custom	17'0"	19'6"	82"	40"	76"	20"	1700 lbs.	7 persons	135 h.p.	1115 lbs.
17' TR-170 O.B. Deluxe	17'0"	19'6"	82"	40"	76"	20"	1700 lbs.	7 persons	135 h.p.	1140 lbs.
17' TR-170 I.O.	17'0"	19'6"	82"	40"	76"	34"	1500 lbs.	7 persons	165 h.p.	1200 lbs.*

**TR-170 O.B. Custom Standard Equipment Includes:** Twin Plexiglass Windshields • Back-to-Back Convertible Sleeper Seats • Running Lights • Bow Rails • Positive Foam Flotation • **Available Accessories:** Forward Hatch and Bow Seat Cushions • **TR-170 O.B. Deluxe/I.O. Standard Equipment Includes:** Safety Glass Windshield with Center Door • Back-to-Back Convertible Sleeper Seats • Forward Hatch and Bow Seat Cushions • Electric Bilge Pump • Running Lights • Bow Rails • Deluxe Vinyl Interior • Positive Foam Flotation • Convertible Top Group • Forward Compartment Drain Scuppers • Stern Seats (I.O. only) • Forward Hatch and Bow Seat Cushions • Electric Bilge Pump • Electric Bilge Blower (I.O. only) • 18 Gallon Fuel Tank (I.O. only) • **Available Accessories:** 2nd 18 Gallon Fuel Tank (I.O. only) • \*Weight shown is without engine. Add 585 lbs. for 120 h.p. MerCruiser, 597 lbs. for 140 h.p. MerCruiser, 662 lbs. for 165 h.p. MerCruiser, or 568 lbs. for 120 h.p. OMC.



TR-170 SPORT 17' Fiberglass Sport Boat

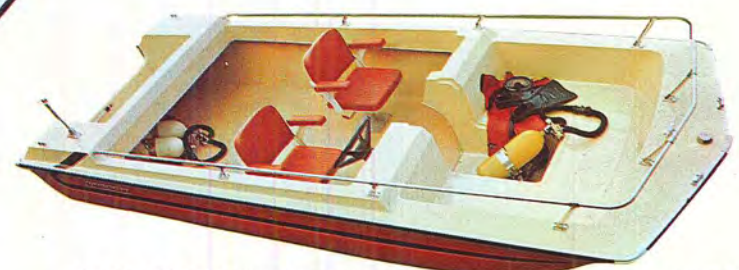


TR-150 SPORT 15' Fiberglass Sport Boat

## TR-170 Sport/TR-150 Sport

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom Width	Transom Height	Recommended Capacity		Approx. Weight	
15' TR-150 Sport	15'1"	17'5"	75"	38"	70"	20"	1400 lbs.	6 persons	85 h.p.	900 lbs.
17' TR-170 Sport	17'0"	19'6"	82"	40"	76"	20"	1500 lbs.	7 persons	135 h.p.	1100 lbs.

**TR-150 Sport Standard Equipment Includes:** Bow Rail • Swivel Fishing Chairs • Mechanical Steering • Running Lights • Positive Foam Flotation • **Available Accessories:** Bow Seat Cushions • **TR-170 Sport Standard Equipment Includes:** Center Console with Windshield • Bow Rail • Swivel Fishing Chair • Self Bailing Cockpit • Mechanical Steering • Running Lights • 25 Gallon Fuel Tank • Casting Platform, Fish Box, and Rod Racks • Positive Foam Flotation • **Available Accessories:** Bow Seat Cushions.

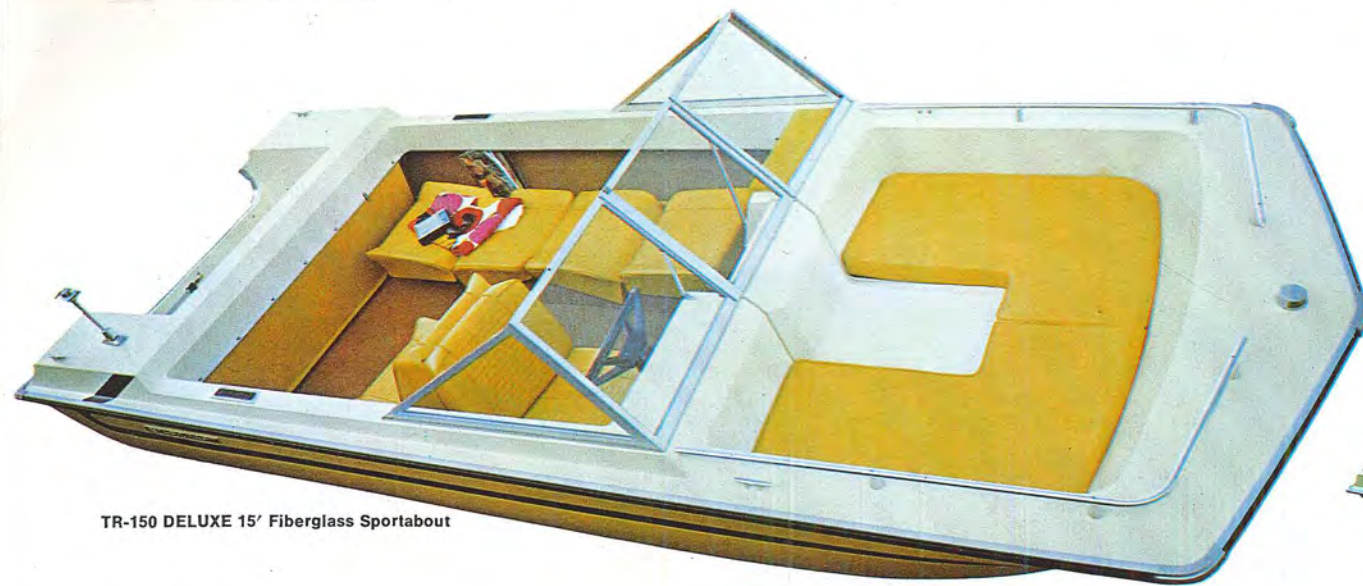

TR-150 DELUXE 15' Fiberglass Sportabout




TR-150 CUSTOM 15' Fiberglass Sportabout

## TR-150 Deluxe/Custom

page 20

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom Width	Transom Height	Recommended Capacity			Approx. Weight
15' TR-150 Custom	15'1"	17'5"	75"	38"	70"	20"	1400 lbs.	6 persons	85 h.p.	880 lbs.
15' TR-150 Deluxe	15'1"	17'5"	75"	38"	70"	20"	1400 lbs.	6 persons	85 h.p.	900 lbs.


**TR-150 Custom Standard Equipment Includes:** Twin Plexiglass Windshields • Back-to-Back Convertible Sleeper Seats • Mechanical Steering • Running Lights • Bow Rail • Positive Foam Flotation • **Available Accessories:** Forward Hatch and Bow Seat Cushions • **TR-150 Deluxe Standard Equipment Includes:** Safety Glass Windshield with Center Door • Back-to-Back Convertible Sleeper Seats • Mechanical Steering • Running Lights • Bow Rail • Deluxe Vinyl Interior • Forward Hatch and Bow Seat Cushions • Positive Foam Flotation.

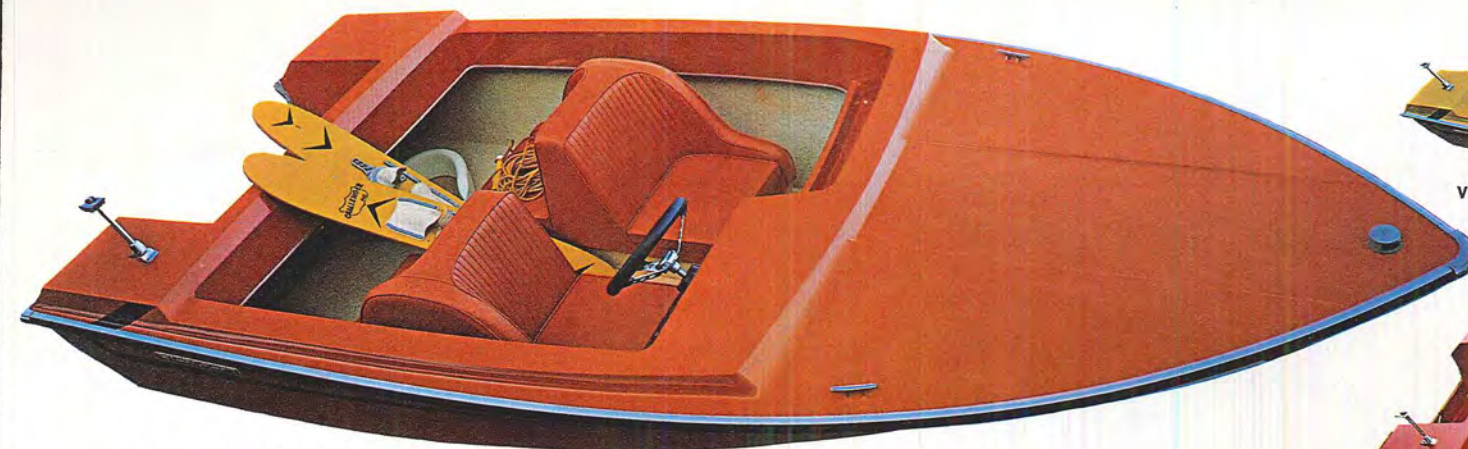

V-140 MODIFIED 14' Fiberglass Runabout



V-150 MODIFIED 15' Fiberglass Runabout

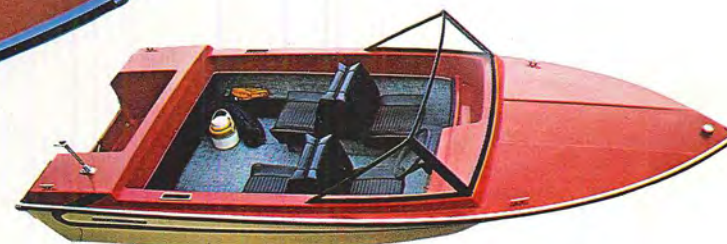

V-150 DELUXE 15' Fiberglass Runabout


## V-140 Modified/V-150 Modified/Deluxe

page 21

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom Width	Transom Height	Recommended Capacity			Approx. Weight
14' V-140 Modified	14'4"	15'5"	75"	35"	70"	20"	1050 lbs.	4 persons	65 h.p.	640 lbs.
15' V-150 Modified	15'4"	16'4"	75"	35"	69"	20"	1250 lbs.	5 persons	85 h.p.	700 lbs.
15' V-150 Deluxe	15'4"	16'4"	75"	35"	69"	20"	1250 lbs.	5 persons	85 h.p.	740 lbs.

**V-140/V-150 Modified Standard Equipment Includes:** Mechanical Steering • Back-to-Back Seats • Running Lights • Positive Foam Flotation • **V-150 Deluxe Standard Equipment Includes:** Plexiglass Windshield • Mechanical Steering • Back-to-Back Seats • Convertible Sleeper Seats • Deluxe Vinyl Interior • Running Lights • Positive Foam Flotation. **Optional Colors V-150:** Red with full-width Black seats, or Yellow with individual White seats, back-to-back./V-140: Yellow with full-width Black seats, or Orange with individual White seats, back-to-back.

# Starcraft makes boats the hard way. The way you use them.

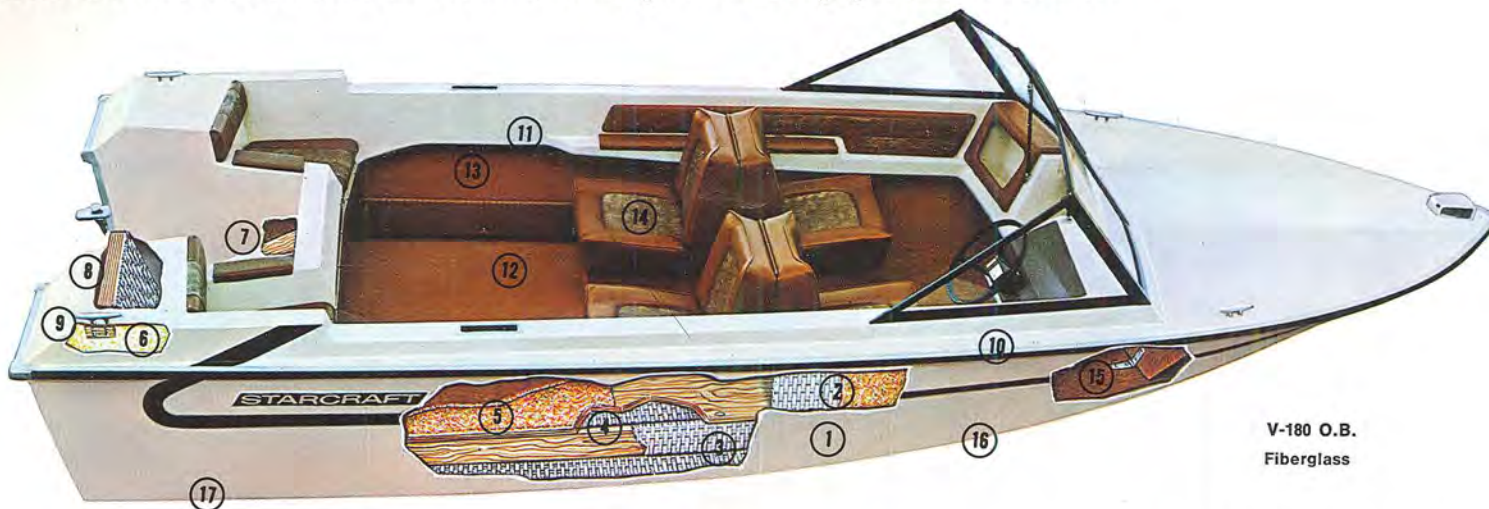

V-180 O.B.  
Fiberglass

8. 1 1/2" of marine grade plywood is laminated to the transom interior to provide a motor mounting surface that absorbs thrust and vibration.

9. All deck hardware is bolted in place thru wood mounting blocks fiberglassed to the under side of the deck.

10. Anodized aluminum extrusions with vinyl bumper inserts completely protect the gunwale.

11. Interior trim extrusions completely cover exposed fiberglass edges.

12. Marine vinyl interior trim is mildew and ultraviolet resistant to give soft, long-lasting styling appeal.

13. Side panels add strength to both the deck and hull sides while providing convenient compartments for storage.

14. Reclining "sleeper" seats have additional storage room in boxes beneath.

15. Hinged footrest makes entire bow area accessible for storage.

16. Modified Deep V bottom design enters the water sharply at bow, and by flattening the V at the transom gains stability and lift for fast performance.

17. Bottom strakes and reverse chines keep spray flat and away from hull. Sharp radii on all corners make this bottom extremely clean running, fast, and dry.

1. The fiberglass gel cote finish is sprayed to an 18 mil thickness for uniform color depth.

2. Successive layers of chopped fiberglass strand (to give a smooth uniform finish under the gel cote) and hand laid woven roving (for uniform thickness and strength) are applied to build an average hull thickness of 3/8".

3. In high stress areas, such as along the keel, the bottom strakes and at the chine,


an extra layer of hand laid fiberglass woven roving is added.

4. Three longitudinal wood stringers are bonded to the hull with transverse braces for floor support every 24". The hand laid two-layer Fab-mat® fiberglass mat and woven roving that encase these stringers extends from chine to chine and adds even more thickness and strength to the hull.

5. A plywood floor is fiberglassed in place to complete a bridge truss type of hull support.

6. Positive foam flotation material is scientifically placed under the deck in accordance with Starcraft's proven standards of level boat flotation.

7. Wood supports are fiberglassed at all points of deck stress so one can walk or step any place.

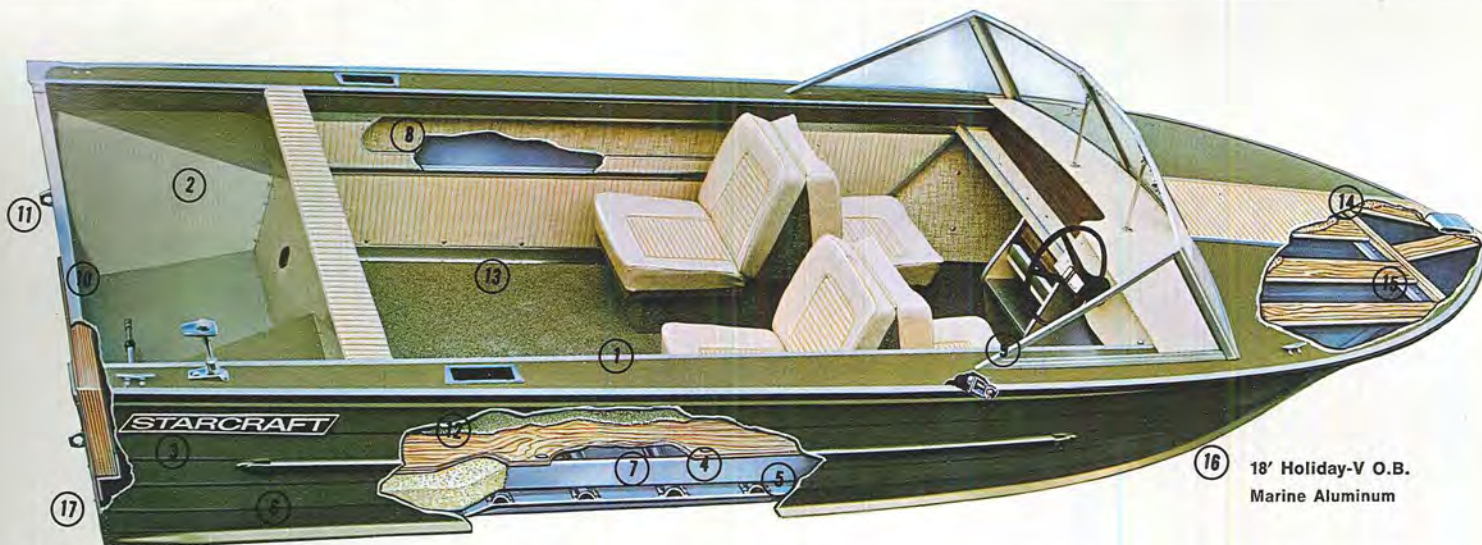

18' Holiday-V O.B.  
Marine Aluminum

deck. All aluminum extrusions are anodized to provide long lasting corrosion resistance.

10. Transoms are constructed of heavy gauge (.086) Marine Aluminum and backed by 1 1/4" 13 ply marine plywood and knee supports to keel.

11. Additional plywood motor mount reduces vibration and noise by eliminating metal to metal contact.

12. Positive foam flotation material is placed under floor in compliance with Boating Industry Association flotation standards.

13. Marine vinyl interior trim is mildew and ultraviolet resistant to give soft, long-lasting styling appeal.

14. Decks are installed over Insolite® foam padding to eliminate vibration and noise.

15. Deck framing is fastened with stainless steel bolts, Shakeproof® nuts and aluminum angles for long lasting durability.

16. Swept back bow rake provides smooth dry entry into water. Longitudinal ribs above and below the chine absorb and distribute wave shock.

17. Concave-V bottom design (another Starcraft original) enters water smoothly with sharp V in center, yet retains lift and stability by flaring the V toward the chine. The resulting ride is without equal in the Marine Aluminum industry.

1. Only 5052 "Marine Aluminum" is used in hulls and decks as recommended by The Aluminum Association for maximum corrosion resistance in fresh or salt water.

2. A vinyl base high gloss enamel is applied over a special acid etch primer for maximum adhesion to add styling appeal.

3. Lapstrake styling is gently rolled into hull sides to add strength, spray control, and eye appeal without adding weight.

4. The one piece bottom (a Starcraft original) eliminates a center keel seam.

5. Seams at the chine are triple sealed (first with NuChromseal® rubber tape between the metal parts, then with Pliobond® liquid sealer both inside and outside) then double riveted for 15 years of guaranteed leak proof operation.

6. Spray rails are rolled into the chine to deflect spray away from the boat.

7. Hull metal is unitized to exterior keels, interior ribs and stringers by solid aluminum rivets in air frame type construction.

8. Exterior hull bumper rail is joined with interior side storage racks to provide conveniences with additional support halfway between chine and gunwale.

9. Extruded gunwale bumpers inside and out eliminate exposed rivets, add strength and feature vinyl bumper inserts to protect the hull and



## Skylark II

Specifications:	Center Length	Gunwale Length	Beam	Maximum Depth	Transom		Recommended Capacity		Approx. Weight	Sail Area	Mast Height
					Width	Height	Pounds	Persons			
<b>14' Skylark II</b>	14'2"	15'5"	56"	18"	44"	7"	450 lbs.	3	250 lbs.	100 sq. ft.	22'
<b>Skylark II Standard Equipment Includes:</b> Tunnel Planing Hull • Dacron Sail • Flexible Aluminum Mast • Positive Foam Flo- tation • Retractable Twin Bilge Boards • Kick-Up Rudder • Boom Vang • Self Draining Cockpit • Traveller • Hiking Strap • Bow Handle.											



**STARCRAFT**  
 THE WIDE WORLD OF RECREATION

Starcraft Company, Goshen, Indiana 46526

The last word in boats. Campers & Travel Trailers. And Snowmobiles.

Because of constant product improvement throughout the model year, Starcraft reserves the right to change specifications without notice.

Litho in U.S.A.

©1970 Starcraft Company